

Karakteristika




- Specially designed for insects control at windows such as food establishments and industry, tollbooth and kiosks.
- High velocity air barrier to prevent flying insects from entering a building.
- Valid for service windows according to NSF 37 standard.
- Selvbærende beklædningskonstruktion lavet af galvaniseret stålplader, afsluttet i strukturel hvid epoxy-polyester maling RAL9016 som standard. Andre farver og rustfrit stål er tilgængelige ved anmodning.
- Stor facetteret indtaglameller uden brug for intensiv vedligeholdelse.
- Anodiseret aluminium udtagslameller, airfoil formet, justerbar i begge retninger.
- Low noise double-inlet centrifugal fans with external rotor motor. 2-speed controller.
- "A" type uden varme, kun luft.
- Inkluderer regulering med infrarød fjernbetjening og indbygget tastatur med LED.

Specifikationer

50Hz

Uopvarmet		
Model	Nominel luftstrøm (m³/h)	Anbefalet installationshøjde (m)
COMPACT FLY 600 A	1150	-
COMPACT FLY 900 A	1725	-

Dimensioner

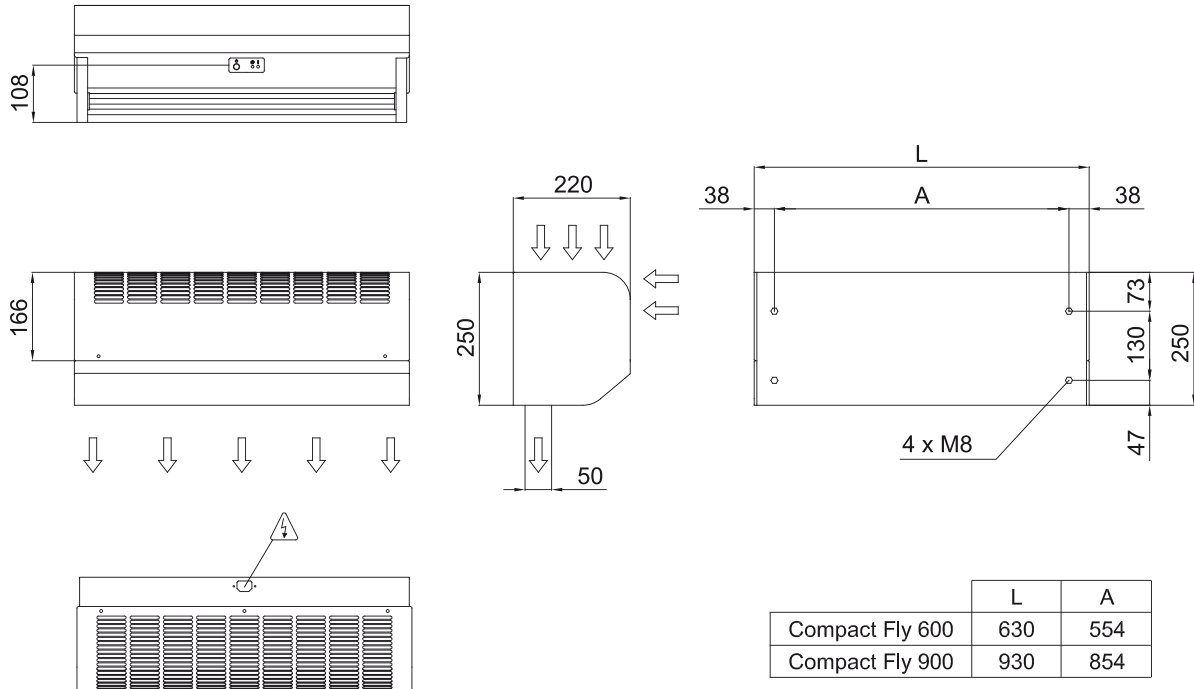

	L	A
Compact Fly 600	630	554
Compact Fly 900	930	854