

## Karakteristika



## Specifikationer




50Hz

Uopvarmet		
Model	Nominel luftstrøm (m <sup>3</sup> /h)	Anbefalet installationshøjde (m)
ARIS 1000 A	1500	2,2-2,8
ARIS 1500 A	2150	2,2-2,8
ARIS 2000 A	2900	2,2-2,8

Elektrisk varme				
Model	Nominel luftstrøm (m <sup>3</sup> /h)	Elektrisk opvarmningskapacitet 230Vx1 (kW)	Elektrisk opvarmningskapacitet 400Vx3 (kW)	Anbefalet installationshøjde (m)
ARIS 1000 E	1500	-	3,8/5,6	2,2-2,8
ARIS 1000 E-9	1500	-	6/9	2,2-2,8
ARIS 1500 E	2150	-	6/9	2,2-2,8
ARIS 2000 E	2900	-	5,6/11,3	2,2-2,8
ARIS 1000 E230	1500	3,8/5,6	-	2,2-2,8
ARIS 1500 E230-6	2150	3,8/5,6	-	2,2-2,8
ARIS 1500 E230-9	2150	6/9	-	2,2-2,8
ARIS 2000 E230	2900	5,6/11,3	-	2,2-2,8

Vandvarme			
Model	Nominel luftstrøm (m <sup>3</sup> /h)	Opvarmningskapacitet 80 / 60°C (kW)	Anbefalet installationshøjde (m)
ARIS 1000 P	1400	8.2	2,2-2,8
ARIS 1500 P	2100	12.7	2,2-2,8
ARIS 2000 P	2750	16.7	2,2-2,8

Dimensioner

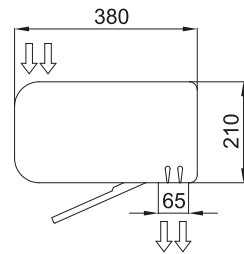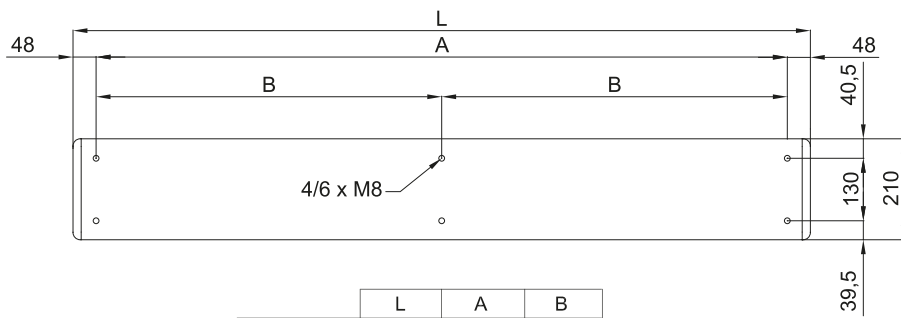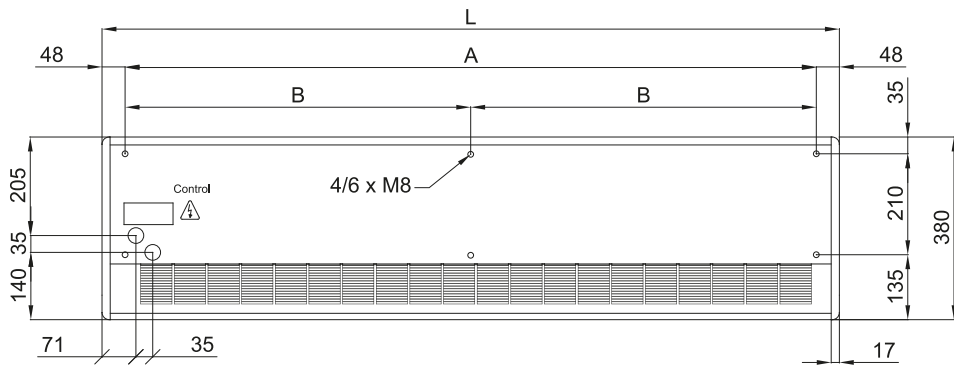

	L	A	B
Aris 1000	1034	940	-
Aris 1500	1534	1440	-
Aris 2000	2034	1940	970